


# Aspire

The Aspire is a versatile and elegant lighting solution. It features a low-glare design (UGR <16), adjustable colour temperatures, and multiple LED modules for different output levels. Offering high efficiency, TP(a) compliance, and a range of optional extras to suit any specification.

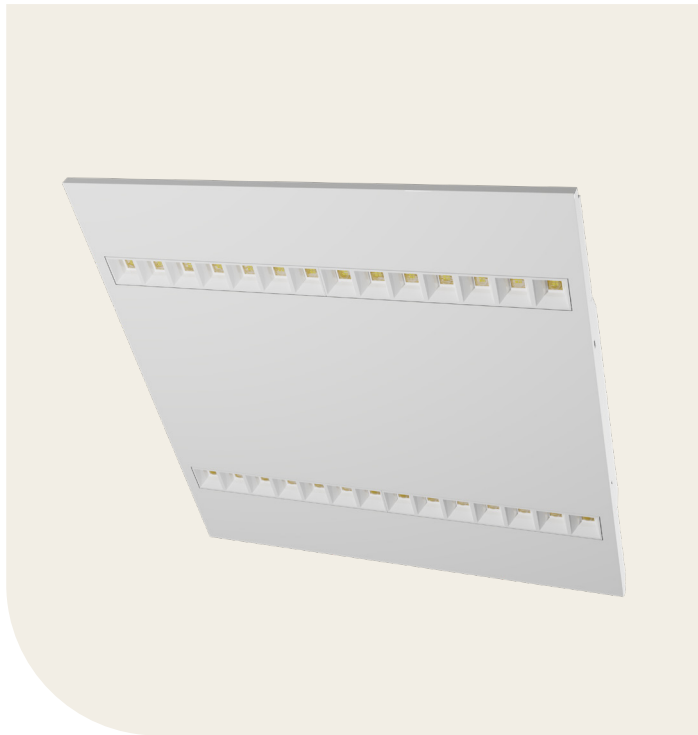

### Features

- Flicker free LED panel
- Tridonic control gear
- UGR 16 & TP(A)
- Individual LED lenses
- Steel housing & polycarbonate diffuser
- Loop in, loop out connection block  
Up to 8 x 2.5mm<sup>2</sup> terminals (see page 154)
- 22K, 27K, 3K, 4K, 5K, 65K LEDs

### Applications

- Education
- Leisure
- Office
- Retail


### Options and Accessories

- EM** Integral Emergency
- EMST** Integral Emergency Self Test
- CF** Corridor Function
- DD** SwitchDIM/DALI
- WL** Wireless Control System
- WLEM** Wireless Monitored Emergency

### Technical Details

Part No.	Description	Power (W)	Luminaire Lumens	LI/cW
ASP-18-4K	Slim Versatile Panel Luminaire   600 x 600	18	2580	143.0
ASP-27-4K	Slim Versatile Panel Luminaire   600 x 600	27	3750	138.0

### Photometric

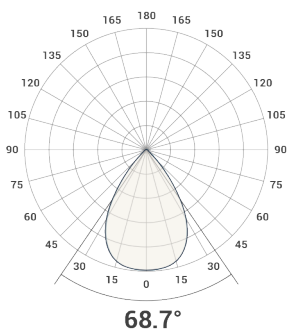

### Dimensions

