


CLGT Gear Tray

The CLGT replaces existing 2D lamp and control gear with an ultra efficient LED module

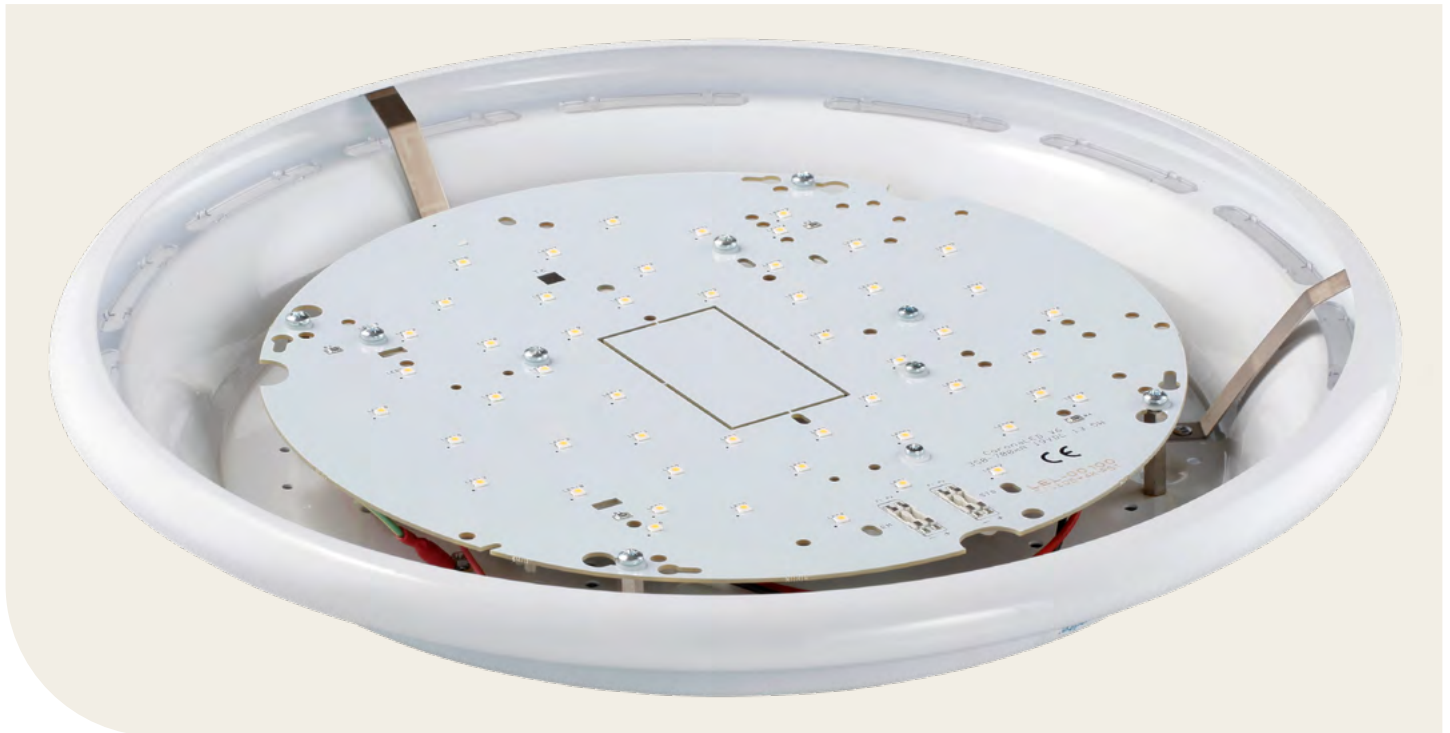

Features

- Reduces energy consumption
- UK manufactured
- 5 Year warranty
- Maintenance free "fit & forget"
- Replaces existing 2D lamps
- 22K, 27K, 3K, 4K, 5K, 65K LED Options


Applications

- Education
- Leisure
- Office
- External
- Retail


Accessories

- EMFL** EM LiFePO4 (4W)
- EMFLST** EM SELFTTEST LiFePO4 (4W)
- EMFLP** EM PRO LiFePO4 (4W)
- DD** SwitchDIM/DALI
- MW** Microwave sensor (IR Programmer required)
- CF** Corridor Function

Photometric



Dimensions

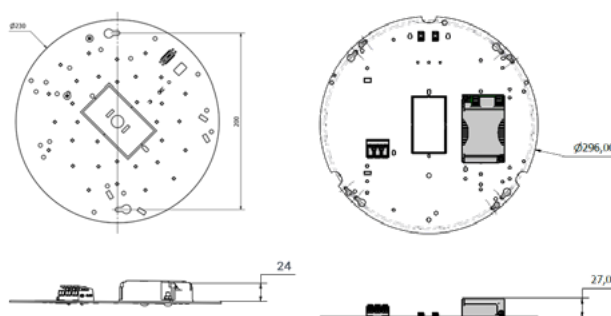

CLGT Gear Tray



Technical Details

Part No.	Description	Power (W)	Luminaire Lumens	LI/cW
CLGT32504K	LED Gear Tray ø230mm	6	1009	168.2
CLGT32704K	LED Gear Tray ø230mm	10	1659	165.9
CLGT32104K	LED Gear Tray ø230mm	14	2228	159.1
CLGT48504K	LED Gear Tray ø296mm	10	1659	165.9
CLGT48704K	LED Gear Tray ø296mm	14	2228	159.1
CLGT48104K	LED Gear Tray ø296mm	21	3234	154.0

Multi Wattage Technical Details

Part No.	Description	Power (W)	Luminaire Lumens	LI/cW
CLGT-6-14-4K	Multi-Wattage LED Gear Tray ø230mm	6 - 14	1009 - 2228	168.2
CLGT-7-21-4K	Multi-Wattage LED Gear Tray ø296mm	7 - 21	1161 - 3234	165.9

Additional Information

Body Material	Diffuser Material	Housing Colour	Mounting Type	CCT Offering	CRI	SDCM	UGR Rating	Dimmable	Dimming Method
N/A	N/A	N/A	N/A	22K, 27K, 3K, 4K, 5K, 65K	80+	3 step Macadam Ellipse	N/A	Available	SwitchDIM/DALI

IP Rating	IK Rating	Operating Temperature (°C)	L/B value ^A	Terminal Information	Warranty	Weight (kg)
N/A	N/A	-20° + 40°	60K+ L90/B10	2.5mm Push connector	5 Year warranty 1 year parts and Labour Inclusive	1.52

^A: L/B value based on Ta25°C operating temperature, standard operation of luminaire within stated parameters. For specific detail please contact info@powerlitefitz.co.uk
Please contact info@powerlitefitz.co.uk for the Inrush current (A) & No.Per 10A breaker.