

EM Box

This EM Exit Box has a compact and decorative design with high luminance performance. The housing provides downlight through a carefully designed panel on the lower surface of the luminaire to assist in the illumination of the emergency escape route.



Features

- PC housing with IP40 & IK07 rating
- Light guide plate, distributing light evenly
- A replaceable up-pictogram legend design is included. Right, left, and down are available upon request.
- Wall mounting/Recessed mounting only with 4 springs.
- LiFePO4


Applications

- Education
- Health Care
- Leisure
- Office
- External
- Industry
- Manufacturing
- Retail
- Social Housing


Accessories

- | | |
|--------------|--------------------|
| UP | Up Arrow Legend |
| DOWN | Down Arrow Legend |
| LEFT | Left Arrow Legend |
| RIGHT | Right Arrow Legend |

Photometric

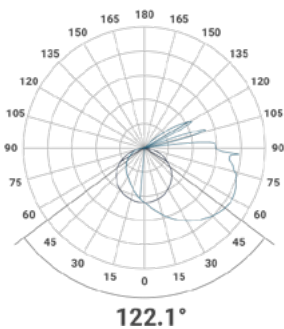

Dimensions

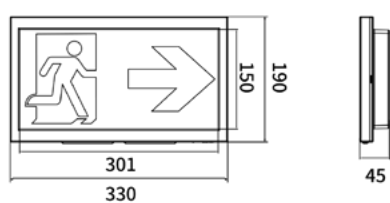

Additional Information


BSEN ISO 7010 legends as standard.



A replaceable up-pictogram legend design is included.

Right, left, and down are available upon request.

EM Box



Technical Details

Part No.	Description	Mains Power (W)	Emergency Power (W)	Charge Duration	Discharge Duration	Discharge Duration
EXB-3-ST	Emergency Exit Box Self Test	2-5	1.5	24H	3H	LiFePO4 3.2V 1500mAh

Body Material	Diffuser Material	Housing Colour	Mounting Type	CCT Offering	CRI	SDCM	UGR Rating	Dimmable	Dimming Method
Polycarbonate	Acrylic	RAL9003	Surface Recessed	22K, 27K, 3K, 4K, 5K, 65K	80+	3 step Macadam Ellipse	N/A	N/A	N/A

IP Rating	IK Rating	Operating Temperature (°C)	L/B value^A	Terminal Information	Warranty	Weight (kg)
IP40	IK07	0° + 40°	60K+ L90/B10	2.5mm Push connector	5 Year warranty 1 year parts and Labour Inclusive	0.8

*A: L/B value based on Ta25°C operating temperature, standard operation of luminaire within stated parameters. For specific detail please contact info@powerlitefitz.co.uk
Please contact info@powerlitefitz.co.uk for the Inrush current (A) & No.Per 10A breaker.