

Mondo

Downlighters designed to be cost effective, efficient and functional, complete with integral driver. Available in a range of cut-outs.



Features

- Tool-free assembly
- Spring clip pre-assembled
- 10W, 20W, & 30W options available
- 60° Or 90° options
- IP44 Option with diffuser available
- 22K, 27K, 3K, 4K, 5K, 65K LEDs

Applications

- Architectural
- Education
- Health Care
- Leisure
- Office
- Retail


Options and Accessories

- EM Integral Emergency
- EMST Integral Emergency Self Test
- IP44 IP44 Rated Option with Opal Diffuser
- IP65 IP65 Rated
- DD SwitchDIM/DALI


Technical Details

Part No.	Description	Power (W)	Luminaire Lumens	LI/cW
MOL-10-60D-4K	Fixed Recessed Downlight 60° 100mm Cut-out	10	1230	123.0
MOL-10-90D-4K	Fixed Recessed Downlight 90° 100mm Cut-out	10	1230	123.0
MOL-20-60D-4K	Fixed Recessed Downlight 60° 150mm Cut-out	20	2488	124.4
MOL-20-90D-4K	Fixed Recessed Downlight 90° 150mm Cut-out	20	2488	124.4
MOL-30-60D-4K	Fixed Recessed Downlight 60° 200mm Cut-out	30	4057	135.2
MOL-30-90D-4K	Fixed Recessed Downlight 90° 200mm Cut-out	30	4057	135.2

Photometric

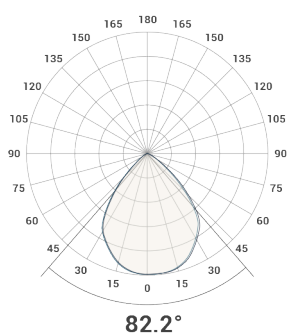

Dimensions

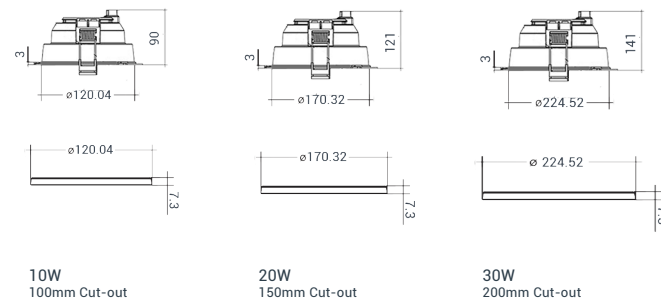

Dimension drawings include driver height