

# Mondo

Downlighters designed to be cost effective, efficient and functional, complete with integral driver. Available in a range of cut-outs.



## Features

- Tool-free assembly
- Spring clip pre-assembled
- 10W, 20W, & 30W options available
- 60° Or 90° options
- IP44 Option with diffuser available
- 3K, 4K LEDs


## Applications

- Education
- Health Care
- Leisure
- Office
- Retail


## Accessories

- EMFL** EM LiFePO4 (4W)
- EMFLST** EM SELFTTEST LiFePO4 (4W)
- EMFLP** EM PRO LiFePO4 (4W)
- IP44** IP44 Rated Option with Opal Diffuser
- IP65** IP65 Rated
- DD** SwitchDIM/DALI

## Photometric



## Dimensions

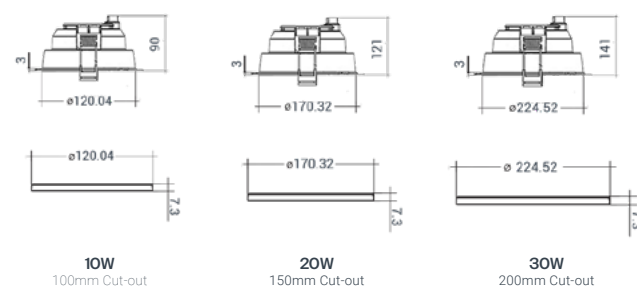

Dimension drawings include driver height

# Mondo



## Technical Details

Part No.	Description	Power (W)	Luminaire Lumens	LI/cW
MOL-10-60D-4K	Fixed Recessed Downlight   60°   100mm Cut-out	10	1230	123.0
MOL-10-90D-4K	Fixed Recessed Downlight   90°   100mm Cut-out	10	1230	123.0
MOL-20-60D-4K	Fixed Recessed Downlight   60°   150mm Cut-out	20	2488	124.4
MOL-20-90D-4K	Fixed Recessed Downlight   90°   150mm Cut-out	20	2488	124.4
MOL-30-60D-4K	Fixed Recessed Downlight   60°   200mm Cut-out	30	4057	135.2
MOL-30-90D-4K	Fixed Recessed Downlight   90°   200mm Cut-out	30	4057	135.2

Body Material	Diffuser Material	Housing Colour	Mounting Type	CCT Offering	CRI	SDCM	UGR Rating	Dimmable	Dimming Method
Mild Steel	Aluminium	RAL9003	Recessed	3K, 4K	80+	3 step Macadam Ellipse	N/A	Available	SwitchDIM/DALI

IP Rating	IK Rating	Operating Temperature (°C)	L/B value <sup>*A</sup>	Terminal Information	Warranty	Weight (kg)
IP20	N/A	-20° + 40°	60K+ L90/B10	2.5mm Push connector	5 Year warranty 1 year parts and Labour Inclusive	0.32

<sup>\*A</sup>: L/B value based on Ta25°C operating temperature, standard operation of luminaire within stated parameters. For specific detail please contact [info@powerlitefitz.co.uk](mailto:info@powerlitefitz.co.uk)  
Please contact [info@powerlitefitz.co.uk](mailto:info@powerlitefitz.co.uk) for the Inrush current (A) & No.Per 10A breaker.