


# Municipal

With its curved profile and dust limiting, wipe clean diffuser, the Municipal has been designed as a contemporary and attractive solution for education and Health Care establishments.

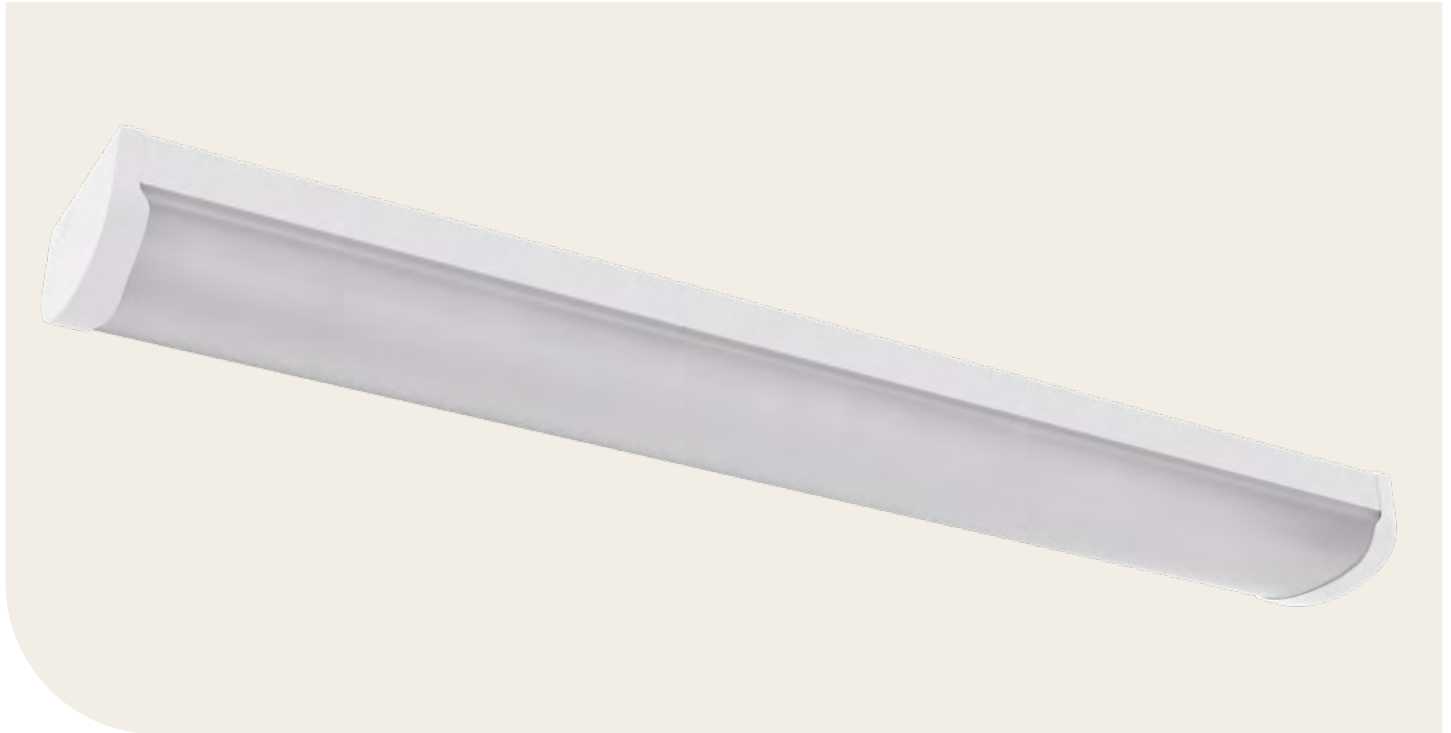

## Features


- PMMA wipe clean smooth diffuser
- Manufactured from mild steel
- Available with night light function
- Screw fixed polycarbonate end cap
- Removable gear tray
- IP44
- Bespoke RAL finish available
- 22K, 27K, 3K, 4K, 5K, 65K LEDs

## Applications


- Education
- Health Care
- Leisure
- Office
- Retail

## Accessories


## Photometric



## Dimensions

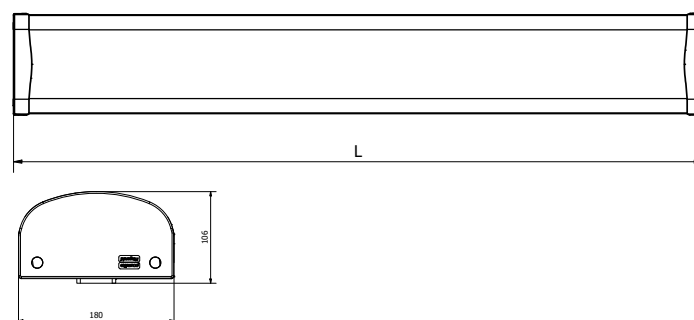

## Additional Information

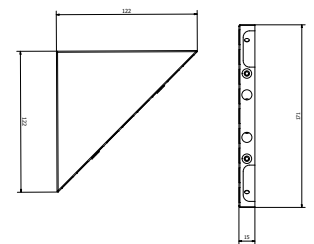

Corner Bracket

# Municipal



## Technical Details

Part No.	Description	Power (W)	Luminaire Lumens	LI/cW
MUN2-22-2-4K	Curved Profile Batten Luminaire   630mm	22	3012	136.9
MUN2-32-4-4K	Curved Profile Batten Luminaire   1230mm	32	4285	133.9
MUN2-44-4-4K	Curved Profile Batten Luminaire   1230mm	44	5520	125.5
MUN2-27-5-4K	Curved Profile Batten Luminaire   1530mm	27	3750	138.8
MUN2-38-5-4K	Curved Profile Batten Luminaire   1530mm	38	5042	132.7
MUN2-53-5-4K	Curved Profile Batten Luminaire   1530mm	53	7126	134.4

## Multi-Wattage Technical Details

Part No.	Description	Power (W)	Luminaire Lumens	LI/cW
MUN2-17-30-4-4K	Multi-Wattage Curved Profile Batten Luminaire   1230mm	17 - 30	2276 - 4017	133.9
MUN2-20-35-5-4K	Multi-Wattage Curved Profile Batten Luminaire   1530mm	20 - 35	2776 - 4858	138.8

## Additional Information

Body Material	Diffuser Material	Housing Colour	Mounting Type	CCT Offering	CRI	SDCM	UGR Rating	Dimmable	Dimming Method
Mild Steel	Acrylic	RAL9003	Surface Suspended	22K, 27K, 3K, 4K, 5K, 65K	80+	3 step Macadam Ellipse	N/A	Available	SwitchDIM/DALI

IP Rating	IK Rating	Operating Temperature (°C)	L/B value <sup>*A</sup>	Terminal Information	Warranty	Weight (kg)
IP44	N/A	-20° + 40°	60K+ L90/B10	2.5mm Push connector	5 Year warranty 1 year parts and Labour Inclusive	630mm - 2.2 1230mm - 3.9 1530mm - 5.2

\*A: L/B value based on Ta25°C operating temperature, standard operation of luminaire within stated parameters. For specific detail please contact [info@powerlitefitz.co.uk](mailto:info@powerlitefitz.co.uk)

Please contact [info@powerlitefitz.co.uk](mailto:info@powerlitefitz.co.uk) for the Inrush current (A) & No.Per 10A breaker.

# Municipal



Product Specific				Add-Ons							
1	2	3	4	5	6	7	8	9	10	11	12
Range	Wattage	Dimensions	Colour Temp	Control	Sensor	Emergency	Diffuser	RAL	Driver Option	Wiring Options	Special

### 1 Range

Municipal	MUN2 -
2 Wattage *	
20W	20-
27W	27-
54W	54-
Multi-Wattage 17-20W	17-20-
Multi-Wattage 20-35W	20-35-
Other Wattage	**-

\*\* Please note higher wattages not available in smaller sized bodies—please confirm with the sales team. Must confirm if other wattages is permissible with the Sales Team

### 3 Dimensions \*\*

630mm	2-
1230mm	4-
1530mm	5-
Other Size	***-

\* Please Note all sizes are not available with all options –please confirm with the Sales Team

### 4 Colour Temperature

2700K	27K-
3000K	3K-
4000K	4K-
5000K	5K-
6500K	65K-
Tuneable White	TW-

### 5 Controls

DALI Dimming up to 150W	DD-
Other Dimming*	**-

### 6 Sensor Option \*\*\*

On/Off PIR	PIR-
On/Off HF Sensor (IR Programmer required)	MW-
Corridor Function	CF-
Advanced Corridor Function	ACF-
Daylight Dimming PIR	DYPIR-
Wireless Daylighting Dimming Low PIR (<6M)	HSL-
Wireless Daylighting Dimming High PIR (<17M)	HSH-
Other Sensor Option	***-

\*\*\* Please Note Dimming Sensor Options also must include the correct Control Option –please confirm with the Sales Team

### 7 Emergency

EM LiFePO4 (4W)	EMFL-
EM SELFTTEST LiFePO4 (4W)	EMFLST-
EM PRO LiFePO4 (4W)	EMFLP-
Central Battery***	CBS***-
Other Emergency Option	***EM-

### 8 Diffuser Option

N/A

### 9 RAL \*\*\*\*

White (RAL9003)	WH-
Black (RAL9005)	BK-
Other	RAL****-

\*\*\*\* Please Note non-standard RAL colour may require MOQ's—please confirm with the Sales Team

### 10 Driver Options \*\*\*\*\*

100,000hr Driver	EXC-
Low/High Temperature Driver	IND-
Colour Switching	CSW-
Night Light	NL-
Other Driver Option	**-

\*\*\*\*\* Please Note may require additional drivers and additional onsite wiring to operate correctly

### 11 Wiring Options

Dual Switching	DS-
Specific Terminal Label	STL-
Through Wiring	THW-
Other Wiring Options	OW-

### 12 Bespoke Manufacturing

Can't find what you're looking for? Speak to our sales team and we'll find the right solution for your project.

\* Prior to ordering, all part codes must be checked and cleared with the sales team