

Regor 6

High quality LED floodlight constructed from polycarbonate and stainless steel. Non-corrosive construction, ideal for coastal area.



Features

- Tough polycarbonate UV resistant housing
- Stainless steel bracket
- IP65
- IK08
- 22K, 27K, 3K, 4K, 5K, 65K LED Options
- RAL 7040
- Single colour LED Option


Applications

-  Car Park
-  External
-  Leisure


Accessories

- PC** Photocell


Photometric

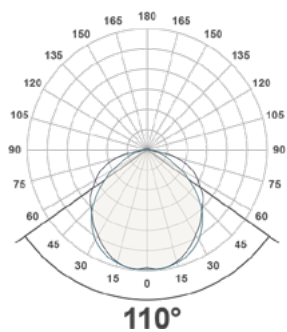

Dimensions

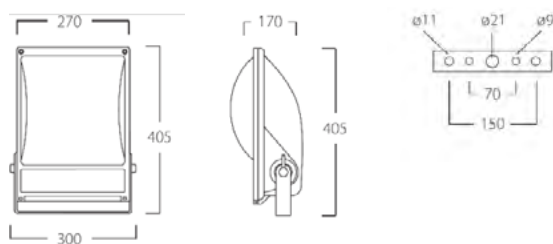

Regor 6



Technical Details

Part No.	Description	Power (W)	Luminaire Lumens	LI/cW
R6L30-WR-4K	Non-corrosive Flood Light	30	4102	136.7
R6L45-WR-4K	Non-corrosive Flood Light	45	6089	135.3
R6L60-WR-4K	Non-corrosive Flood Light	60	8129	135.3

Additional Information

Body Material	Diffuser Material	Housing Colour	Mounting Type	CCT Offering	CRI	SDCM	UGR Rating	Dimmable	Dimming Method
Polycarbonate	Polycarbonate	RAL7040	Surface	22K, 27K, 3K, 4K, 5K, 65K	80+	3 step Macadam Ellipse	N/A	N/A	N/A

IP Rating	IK Rating	Operating Temperature (°C)	L/B value^A	Terminal Information	Warranty	Weight (kg)
IP65	IK08	-20° + 40°	60K+ L90/B10	2.5mm Push connector	5 Year warranty 1 year parts and Labour Inclusive	2.76

*A: L/B value based on Ta25°C operating temperature, standard operation of luminaire within stated parameters. For specific detail please contact info@powerlitefitz.co.uk
Please contact info@powerlitefitz.co.uk for the Inrush current (A) & No.Per 10A breaker.