

Urban Path

The Urban Path is manufactured using high grade seam welded steel, designed to be dark sky compliant and available with a Path, Street or Flood optic. Integral sensor and emergency options. Rated IP65 & IK10+



Features


- Dark sky compliant
- Textured black paint as standard
- Anti-tamper screws
- Bespoke RAL colours
- IP65
- IK10+
- Integral control & dimming options
- Integral photocell option
- Street Optic as Standard
- 22K, 27K, 3K, 4K, 5K, 65K LED Options

Applications

- Car Park
- External
- Roadways
- Social Housing
- Vandal Resistant


Accessories

Photometric



*Flood Optic

Dimensions

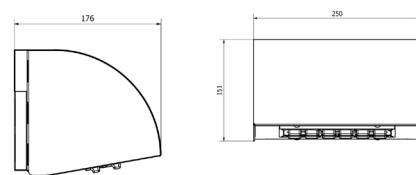

Urban Path



Technical Details

Part No.	Description	Power (W)	Luminaire Lumens	LI/cW
URP-14-S-4K	Vandal Resistant Wall Pack	14	2120	151.4
URP-19-S-4K	Vandal Resistant Wall Pack	19	2768	145.7
URP-25-S-4K	Vandal Resistant Wall Pack	25	3679	147.2

Body Material	Diffuser Material	Housing Colour	Mounting Type	CCT Offering	CRI	SDCM	UGR Rating	Dimmable	Dimming Method
Mild Steel	Polycarbonate	RAL9004	Surface	22K, 27K, 3K, 4K, 5K, 65K	70	3 step Macadam Ellipse	N/A	Available	SwitchDIM/DALI

IP Rating	IK Rating	Operating Temperature (°C)	L/B value ^A	Terminal Information	Warranty	Weight (kg)
IP65	IK10+	-20° + 40°	60K+ L90/B10	2.5mm Push connector	5 Year warranty 1 year parts and Labour Inclusive	2.1

^A: L/B value based on T_a25°C operating temperature, standard operation of luminaire within stated parameters. For specific detail please contact info@powerlitefitz.co.uk

Please contact info@powerlitefitz.co.uk for the Inrush current (A) & No.Per 10A breaker.