

Visage

The Visage is a modern street lighting luminaire made from die-cast aluminium. The luminaire can be supplied in a range of outputs and optional extras. It is IP66 rated and is made with a die-cast aluminium body.



Features

- High intensity die-cast aluminium body
- Quick access for easy maintenance
- Available with NEMA photocell
- Grey housing as standard
- Bespoke RAL finishes available
- IP66
- IK08
- Post top entry
- Multi-wattage
- T3 as standard (T4B available)
- 22K, 27K, 3K, 4K, 5K, 65K LED Options


Applications

-  Car Park
-  External
-  Roadways


Accessories

- | | |
|-----------|-------------|
| 60 | 60mm Collar |
| 76 | 76mm Collar |

Photometric



Dimensions

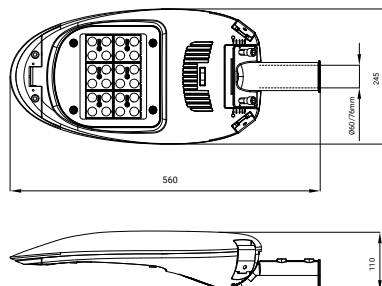

Visage



Technical Details

Part No.	Description	Power (W)	Luminaire Lumens	LI/cW
VI3S-14-40-4K	Multi Wattage Grey Street Light Small	14 - 40	1880 - 5375	134.4
VI3S-50-75-4K	Multi Wattage Grey Street Light Small	50 - 75	6720 - 10080	134.4
VI3S-75-105-4K	Multi Wattage Grey Street Light Small	75 - 105	10080 - 14112	134.4
VI3S-14-40-T4B-4K	T4B Multi Wattage Grey Street Light Small	14 - 40	1880 - 5375	134.4
VI3S-50-75-T4B-4K	T4B Multi Wattage Grey Street Light Small	50 - 75	6720 - 10080	134.4
VI3S-75-105-T4B-4K	T4B Multi Wattage Grey Street Light Small	75 - 105	10080 - 14112	134.4

Body Material	Diffuser Material	Housing Colour	Mounting Type	CCT Offering	CRI	SDCM	UGR Rating	Dimmable	Dimming Method
Die Cast aluminium	Acrylic	RAL7040	Post top	22K, 27K, 3K, 4K, 5K, 65K	80+	3 step Macadam Ellipse	N/A	Available	DALI/Virtual Midnight

IP Rating	IK Rating	Operating Temperature (*C)	L/B value^A	Terminal Information	Warranty	Weight (kg)
IP65	IK08	-20° + 40°	60K+ L90/B10	2.5mm Push connector	5 Year warranty 1 year parts and Labour Inclusive	14W - 40MW - 4.2 75W - 105MW - N/A

*A: L/B value based on Ta25°C operating temperature, standard operation of luminaire within stated parameters. For specific detail please contact info@powerlitefitz.co.uk
Please contact info@powerlitefitz.co.uk for the Inrush current (A) & No.Per 10A breaker.