


Wall Wash

The Wall Wash illuminates with a subtle lighting effect, highly efficient it has been designed to throw light onto the wall from above and is an ideal solution for illuminating products in a retail application.

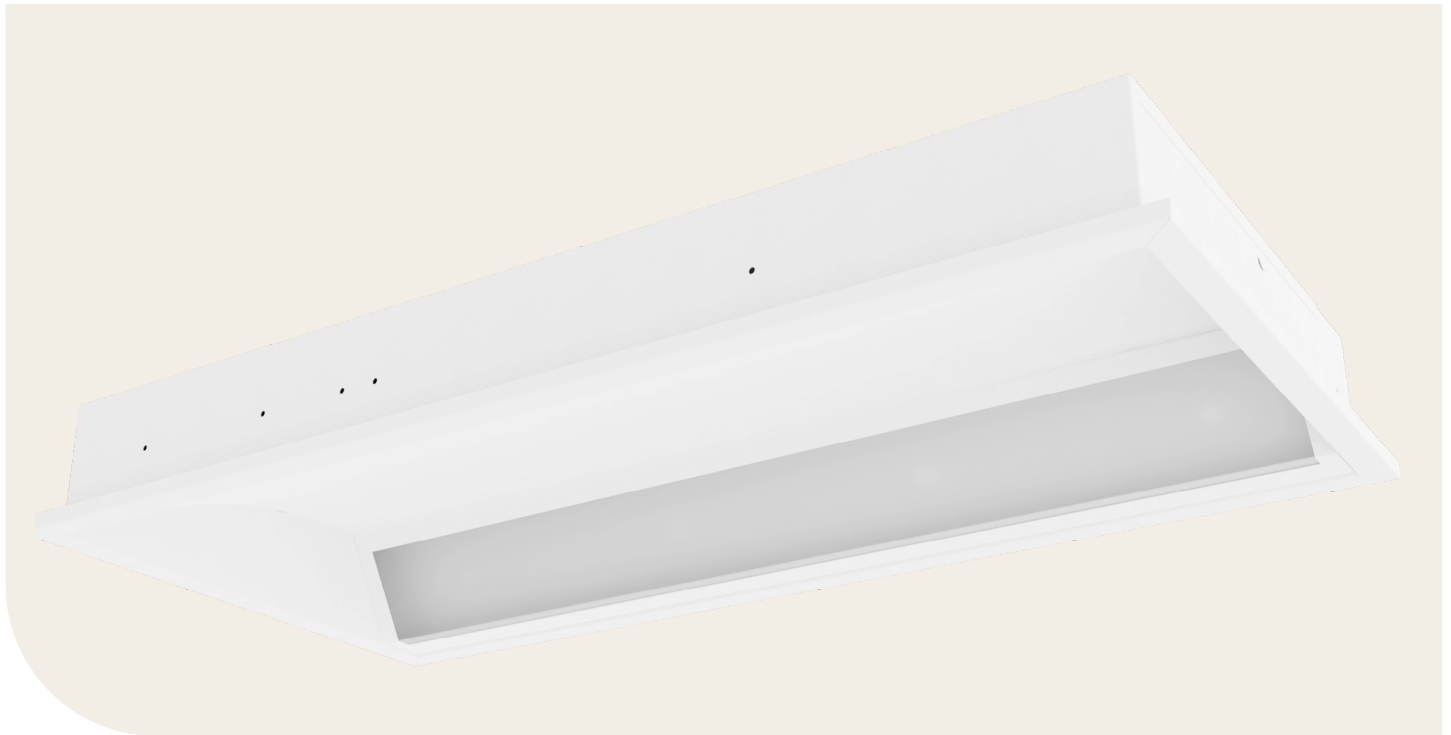

Features

- Quality branded LED chips and drivers
- Cool running for prolonged life
- Highly efficient diffuser
- Dimming options
- Surface version available
- IP20
- Loop in, loop out connection block
Up to 8 x 2.5mm² terminals
- 22K, 27K, 3K, 4K, 5K, 65K LED Options


Applications

- Education
- Office
- Retail


Options and Accessories

- EMFL** EM LiFePO4 (4W)
- EMFLST** EM SELFTTEST LiFePO4 (4W)
- EMFLP** EM PRO LiFePO4 (4W)
- DD** SwitchDIM/DALI
- OW** Off White Paint

Photometric

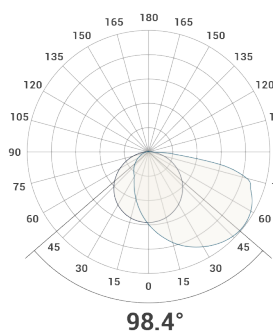


Dimensions

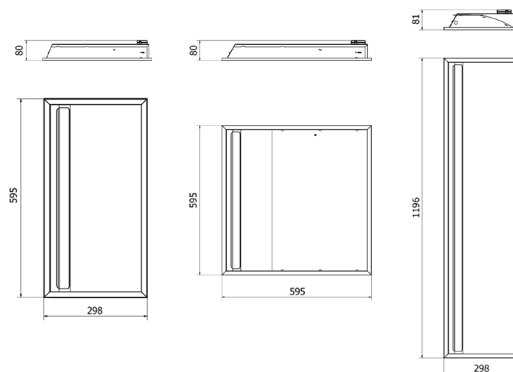

RECESSED

Wall Wash

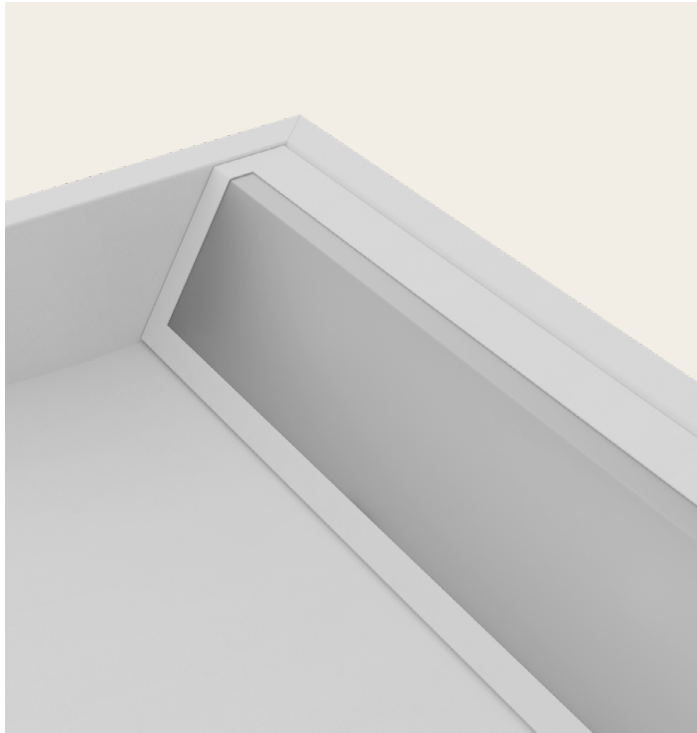

Technical Details

Part No.	Description	Power (W)	Luminaire Lumens	LI/cW
WW2-25-63-4K	25W Recess Mounted T Bar Fixture 600 x 300	25	3332	133.3
WW2-25-66-4K	25W Recess Mounted T Bar Fixture 600 x 600	25	3332	133.3
WW2-50-123-4K	50W Recess Mounted T Bar Fixture 1200 x 300	50	6665	123.4
WW2-50-126-4K	50W Recess Mounted T Bar Fixture 1200 x 600	50	6665	123.4

Additional Information

Body Material	Diffuser Material	Housing Colour	Mounting Type	CCT Offering	CRI	SDCM	UGR Rating	Dimmable	Dimming Method
Steel	Acrylic	RAL9003	Recessed	22K, 27K, 3K, 4K, 5K, 65K	80+	3 step Macadam Ellipse	N/A	Available	SwitchDIM/DALI

IP Rating	IK Rating	Operating Temperature (°C)	L/B value ^{*A}	Terminal Information	Warranty	Weight (kg)
IP20	N/A	-20° + 40°	60K+ L90/B10	2.5mm Push connector	5 Year warranty 1 year parts and Labour Inclusive	600x300 - 2.0 600x600 - 2.9 1200x300 - 2.9 1200x600 - 5.6

^{*A}: L/B value based on T_a25°C operating temperature, standard operation of luminaire within stated parameters. For specific detail please contact info@powerlitefitz.co.uk

Please contact info@powerlitefitz.co.uk for the inrush current (A) & No.Per 10A breaker.

RECESSED

Wall Wash



Example Code

Standard Part No.	Description	Addon Suffix	Suffix Description
WW2-25-63-4K	25W Recess Mounted T Bar Fixture 600 x 300	DD	SwitchDIM/DALI
Final Part No.	Description		
WW2-25-63-DD-4K	25W Recess Mounted T Bar Fixture 600 x 300 SwitchDIM/DALI 4000K		