

Urban Flat

Designed for the urban environment, manufactured in heavy seam welded steel bodies, with an impact resistant prismatic polycarbonate diffuser. Ideal in the toughest of locations.



Features

- Ingress protection to IP65
- Polycarbonate prismatic diffusers
- Manufactured from mild steel
- Constant output driver
- IK10+
- White finish as standard
- 22K, 27K, 3K, 4K, 5K, 65K LED Options


Applications

- Car Park
- External
- Industry
- Social-Housing
- Vandal Resistant


Accessories

- EMFL** EM LiFePO4 (4W)
- EMFLST** EM SELFTTEST LiFePO4 (4W)
- EMFLP** EM PRO LiFePO4 (4W)
- DD** SwitchDIM/DALI
- PC** Photocell
- SI** Silver/Grey Paint Finish
- LG** Light Grey Paint Finish
- BK** Black Paint Finish
- GY** Grey Paint Finish

Photometric



Dimensions

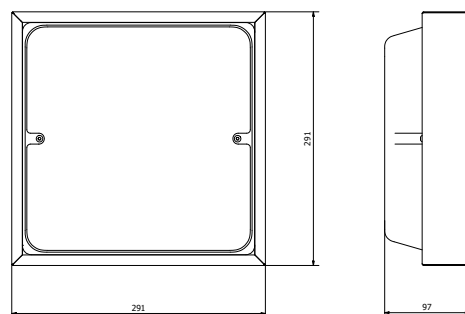

Urban Flat



Technical Details

Part No.	Description	Power (W)	Luminaire Lumens	LI/cW
URF-10-4K	Impact Resistant Exterior Fixture	10	1221	122.1
URF-14-4K	Impact Resistant Exterior Fixture	14	1653	118.1
URF-21-4K	Impact Resistant Exterior Fixture	21	2461	117.2
URF-30-4K	Impact Resistant Exterior Fixture	30	3612	120.1

Body Material	Diffuser Material	Housing Colour	Mounting Type	CCT Offering	CRI	SDCM	UGR Rating	Dimmable	Dimming Method
Steel	Polycarbonate	RAL9003	Surface	22K, 27K, 3K, 4K, 5K, 65K	80+	3 step Macadam Ellipse	N/A	Available	SwitchDIM/DALI

IP Rating	IK Rating	Operating Temperature (°C)	L/B value* ^A	Terminal Information	Warranty	Weight (kg)
IP65	IK10	-20° + 40°	60K+ L90/B10	2.5mm Push connector	5 Year warranty 1 year parts and Labour Inclusive	2.4

*A: L/B value based on Ta25°C operating temperature, standard operation of luminaire within stated parameters. For specific detail please contact info@powerlitefitz.co.uk
Please contact info@powerlitefitz.co.uk for the Inrush current (A) & No.Per 10A breaker.