


Zeta 3

The Zeta offers a sleek, slimline appearance, making it the perfect fit for any modern interior space. The Zeta is designed to simplify installation with plug-and-play continuous run functionality and is available in direct/indirect versions. The Zeta is fully customisable, with options for bespoke RAL finishes, smart dimming controls, emergency, and UGR diffusers to deliver glare-compliant lighting tailored to your project.

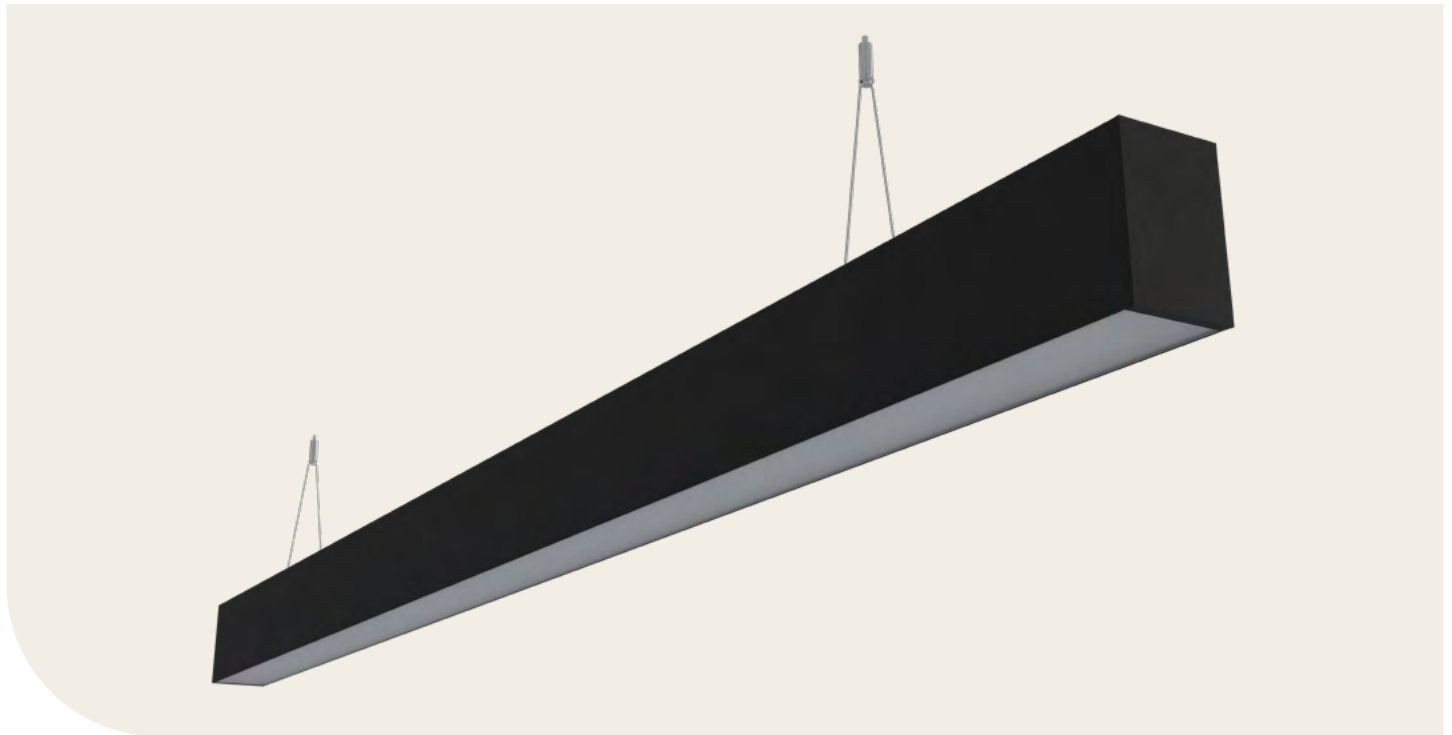

Features

- Individual or continuous run available
- Uplight version available
- Surface-mounted and suspended options
- Plug-and-play continuous run functionality
- 2m flex supplied on all single/starter pieces
- Single lengths up to 3m
- Black as standard (White available)
- Bespoke RAL colour options available
- Integral control and dimming options
- Custom shapes available
- Opal diffuser as standard
- High CRI options available
- 22K, 27K, 3K, 4K, 5K, 65K LED Options


Applications

-  Education
-  Health Care
-  Leisure
-  Office
-  Retail


Accessories

- SU** Suspension Kit (5M)
- THW** Through wired bracket
- UGR** Low glare diffuser

Photometric

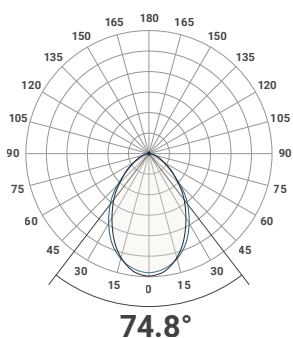

Dimensions

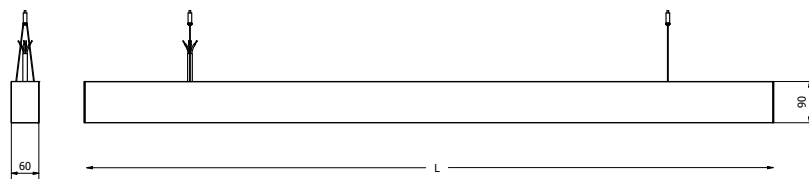

Zeta 3



Technical Details

Part No.	Description	Power (W)	Luminaire Lumens	LI/cW
ZETA3-S-600-10-4K	Architectural Surface Linear Luminaire 600mm	10	1353	135.3
ZETA3-S-1200-15-4K	Architectural Surface Linear Luminaire 1200mm	15	2029	135.3
ZETA3-S-1200-23-4K	Architectural Surface Linear Luminaire 1200mm	23	3111	135.3
ZETA3-S-1200-33-4K	Architectural Surface Linear Luminaire 1200mm	33	4464	135.3
ZETA3-S-1500-20-4K	Architectural Surface Linear Luminaire 1500mm	20	2706	135.3
ZETA3-S-1500-27-4K	Architectural Surface Linear Luminaire 1500mm	27	3652	135.3
ZETA3-S-1500-40-4K	Architectural Surface Linear Luminaire 1500mm	40	5411	135.3
ZETA3-U-600-10-4K	Architectural Up/Downlight Linear Luminaire 600mm	10	1300	130.0
ZETA3-U-1200-15-4K	Architectural Up/Downlight Linear Luminaire 1200mm	25	3249	130.0
ZETA3-U-1200-23-4K	Architectural Up/Downlight Linear Luminaire 1200mm	33	4292	130.1
ZETA3-U-1200-33-4K	Architectural Up/Downlight Linear Luminaire 1200mm	43	5577	129.7
ZETA3-U-1500-20-4K	Architectural Up/Downlight Linear Luminaire 1500mm	30	3901	130.0
ZETA3-U-1500-27-4K	Architectural Up/Downlight Linear Luminaire 1500mm	37	4808	129.9
ZETA3-U-1500-39-4K	Architectural Up/Downlight Linear Luminaire 1500mm	57	7392	129.7

Body Material	Diffuser Material	Housing Colour	Mounting Type	CCT Offering	CRI	SDCM	UGR Rating	Dimmable	Dimming Method
Aluminium	Polycarbonate	RAL9004	Suspended Surface	22K, 27K, 3K, 4K, 5K, 65K	80+	3 step Macadam Ellipse	Available	Available	SwitchDIM/DALI

IP Rating	IK Rating	Operating Temperature (°C)	L/B value^A	Terminal Information	Warranty	Weight (kg)
IP20	N/A	-20° + 40°	60K+ L90/B10	Pre-wire flex	5 Year warranty 1 year parts and Labour Inclusive	600mm - 1.2 1200mm - 2.3 1500mm - 2.9 Up/Downlight 600mm - 1.3 Up/Downlight 1200mm - 2.4 Up/Downlight 1500mm - 3.0

*A: L/B value based on Ta25°C operating temperature, standard operation of luminaire within stated parameters. For specific detail please contact info@powerlitefitz.co.uk
Please contact info@powerlitefitz.co.uk for the Inrush current (A) & No.Per 10A breaker.

Zeta 3



Product Specific				Add-Ons							
1	2	3	4	5	6	7	8	9	10	11	12
Range	Wattage	Dimensions	Colour Temp	Control	Sensor	Emergency	Diffuser	RAL	Driver Option	Wiring Options	Special
1		Range									
Zeta Surface/Suspended		ZETA3-S-									
Zeta Up/Downlight		ZETA3-U-									
2		Wattage *									
10W		10-									
20W		20-									
25W		25-									
40W		40-									
57W		57-									
Other Wattage		**.									
** Please note higher wattages not available in smaller sized bodies—please confirm with the sales team. Must confirm if other wattages is permissible with the Sales Team											
3		Dimensions **									
600mm		600-									
1200mm		1200-									
1500mm		1500-									
Other Size		***.									
* Please Note all sizes are not available with all options —please confirm with the Sales Team											
4		Colour Temperature									
2700K		27K-									
3000K		3K-									
4000K		4K-									
5000K		5K-									
6500K		65K									
Tuneable White		TW-									
5		Controls									
DALI Dimming up to 150W		DD-									
Other Dimming*		**.									
6		Sensor Option ***									
On/Off PIR		PIR-									
Daylight Dimming PIR		DYPIR-									
Wireless Daylighting Dimming Low PIR (<6M)		HSL-									
Wireless Daylighting Dimming High PIR (<17M)		HSH-									
Other Sensor Option		***.									
*** Please Note Dimming Sensor Options also must include the correct Control Option —please confirm with the Sales Team											
7		Emergency									
EM LiFePO4 (4W)		EMFL-									
EM SELFTEST LiFePO4 (4W)		EMFLST-									
EM PRO LiFePO4 (4W)		EMFLP-									
Central Battery***		CBS***-									
Other Emergency Option		***EM-									
8		Diffuser Option									
Opal		OPL-									
9		RAL ****									
White (RAL9003)		WH-									
Black (RAL9005)		BK-									
Other		RAL****.									
**** Please Note non-standard RAL colour may require MOQ's—please confirm with the Sales Team											
10		Driver Options *****									
100,000hr Driver		EXC-									
Other Driver Option		**.									
***** Please Note may require additional drivers and additional onsite wiring to operate correctly											
11		Wiring Options									
Through Wiring		THW-									
Other Wiring Options		OW-									
12		Bespoke Manufacturing									
Can't find what you're looking for? Speak to our sales team and we'll find the right solution for your project.											

* Prior to ordering, all part codes must be checked and cleared with the sales team