

# Spitfire

The Spitfire comes with an IP65 rating and blends modern minimalism with a high-quality, robust build—perfect for outdoor environments. Being dark-sky compliant, the spitfire is designed to protect people and wildlife!



## Features

- IP65
- IK10
- Die cast aluminium
- Polycarbonate Lens & Diffuser
- Integral EM options available
- Various optics available
- Multi-wattage available
- 22K, 27K, 3K, 4K, 5K, 65K LED Options


## Applications

- External
- Vandal Resistant
- Social-Housing

## Accessories

- PATH** Path Optic
- STREET** Street Optic
- FLOOD** Flood Optic

## Dimensions

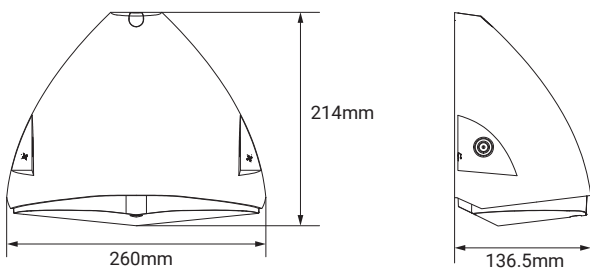

# Spitfire



## Technical Details

Part No.	Description	Power (W)	Luminaire Lumens	LI/cW
SF-8-40-4K	Multi Wattage Modern Wall Pack	8 - 40	1120 - 5600	140.0

Body Material	Diffuser Material	Housing Colour	Mounting Type	CCT Offering	CRI	SDCM	UGR Rating	Dimmable	Dimming Method
Die Cast Aluminium	Polycarbonate	RAL9004	Surface	22K, 27K, 3K, 4K, 5K, 65K	80+	3 step Macadam Ellipse	N/A	Available	SwitchDIM/DALI

IP Rating	IK Rating	Operating Temperature (°C)	L/B value <sup>*A</sup>	Terminal Information	Warranty	Weight (kg)
IP65	IK10	-20° + 40°	60K+ L90/B10	2.5mm Push connector	5 Year warranty 1 year parts and Labour Inclusive	3.0

<sup>\*A</sup>: L/B value based on T<sub>a</sub>25°C operating temperature, standard operation of luminaire within stated parameters. For specific detail please contact [info@powerlitefitz.co.uk](mailto:info@powerlitefitz.co.uk)

Please contact [info@powerlitefitz.co.uk](mailto:info@powerlitefitz.co.uk) for the Inrush current (A) & No.Per 10A breaker.