


Zeta 3 Recessed

The Zeta offers a sleek, slimline appearance, making it the perfect fit for any modern interior space. The Zeta is designed to simplify installation with plug-and-play continuous run functionality. The Zeta is fully customisable, with options for bespoke RAL finishes, smart dimming controls, emergency, and UGR diffusers to deliver glare-compliant lighting tailored to your project.

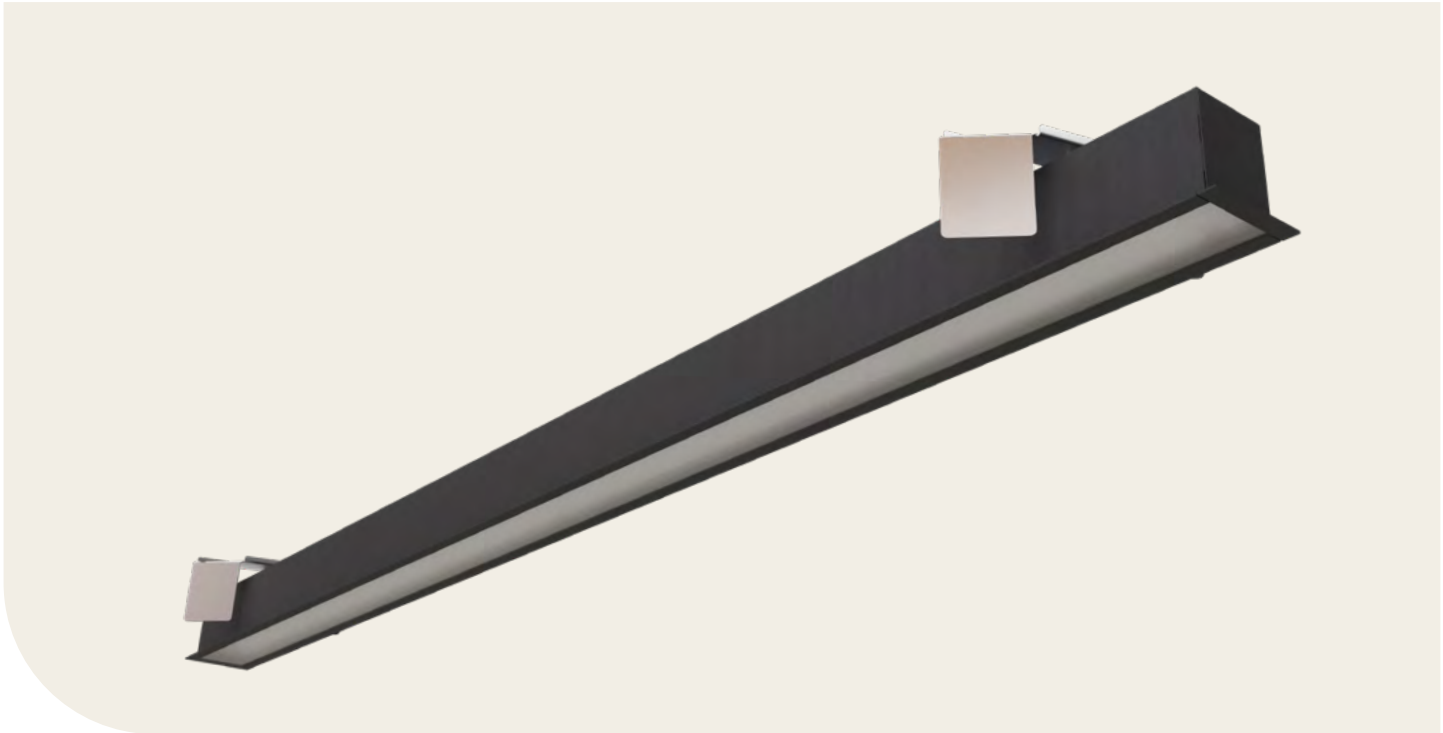

Features

- Individual or continuous run available
- Plug-and-play continuous run functionality
- 2m flex supplied on all single/starter pieces
- Single lengths up to 3m
- Black or White as standard
- Bespoke RAL colour options available
- Integral control and dimming options
- Custom shapes available.
- Opal diffuser as standard
- 22K, 27K, 3K, 4K, 5K, 65K LED Options


Applications

- Education
- Health Care
- Leisure
- Office
- Retail


Accessories

- THW Through wired bracket
- UGR Low glare diffuser

Photometric

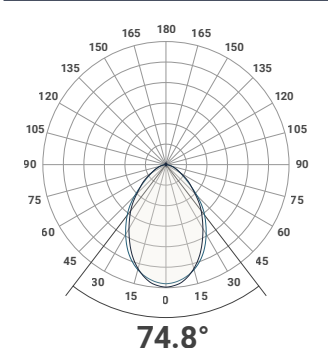

Dimensions

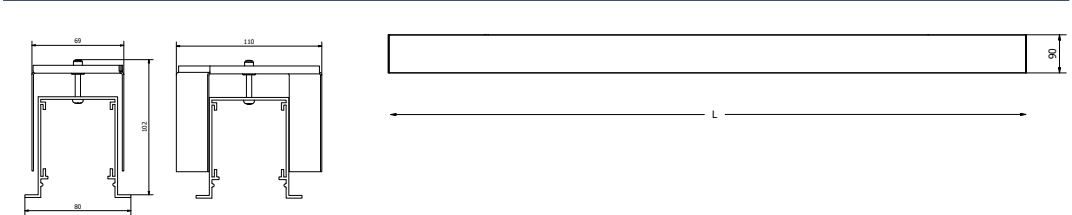

Zeta 3 Recessed



Technical Details

Part No.	Description	Power (W)	Luminaire Lumens	LI/cW
ZETA3-R-600-10-4K	Architectural Recessed Linear Luminaire 600mm	10	1353	135.3
ZETA3-R-1200-15-4K	Architectural Recessed Linear Luminaire 1200mm	15	2029	135.3
ZETA3-R-1200-23-4K	Architectural Recessed Linear Luminaire 1200mm	23	3111	135.3
ZETA3-R-1200-33-4K	Architectural Recessed Linear Luminaire 1200mm	33	4464	135.3
ZETA3-R-1500-20-4K	Architectural Recessed Linear Luminaire 1500mm	20	2706	135.3
ZETA3-R-1500-27-4K	Architectural Recessed Linear Luminaire 1500mm	27	3652	135.3
ZETA3-R-1500-40-4K	Architectural Recessed Linear Luminaire 1500mm	40	5411	135.3

Body Material	Diffuser Material	Housing Colour	Mounting Type	CCT Offering	CRI	SDCM	UGR Rating	Dimmable	Dimming Method
Aluminium	Polycarbonate	RAL9005 RAL9003	Recessed	22K, 27K, 3K, 4K, 5K, 65K	80+	3 step Macadam Ellipse	Available	Available	SwitchDIM/DALI

IP Rating	IK Rating	Operating Temperature (*C)	L/B value^A	Terminal Information	Warranty	Weight (kg)
IP20	N/A	-20° + 40°	60K+ L90/B10	2M Preflex	5 Year warranty 1 year parts and Labour Inclusive	600mm - 1.2 1200mm - 2.3 1500mm - 2.9

*A: L/B value based on Ta25°C operating temperature, standard operation of luminaire within stated parameters. For specific detail please contact info@powerlitefitz.co.uk
Please contact info@powerlitefitz.co.uk for the Inrush current (A) & No.Per 10A breaker.

IP 20

* Prior to ordering, all part codes must be checked and cleared with the sales team