


Artemis

The Artemis is specially designed for large-format sports and recreational areas. Featuring advanced symmetrical and asymmetrical optics, it is the ideal choice for sports pitches, tennis courts, padel courts and golf driving ranges.

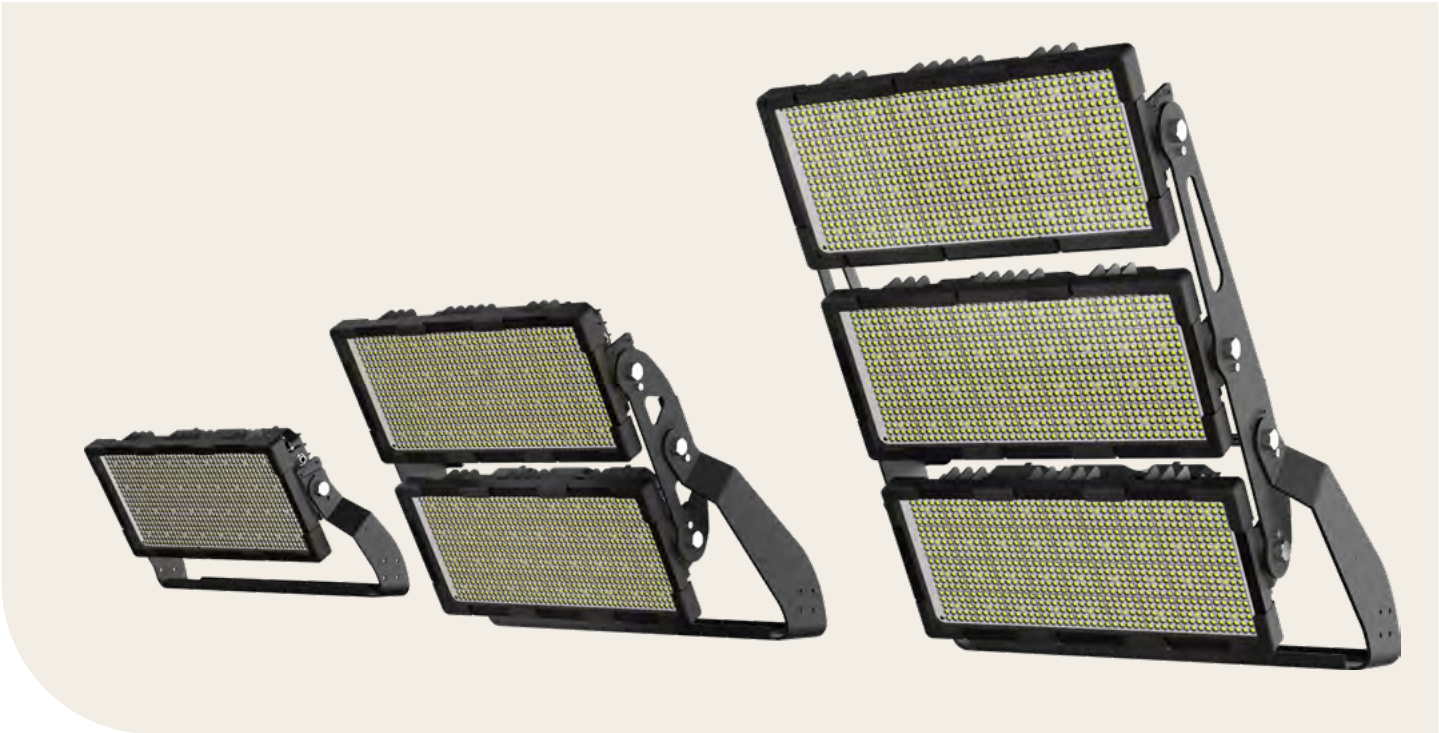

Features

- Die-cast housing
- Custom optics available
- Excellent anti-corrosion performance
- Tempered glass front
- 10KV surge protection as standard
- Optional visor attachment available
- IP66 and IK08 protection
- Up to 155lm/w


Applications

- External
- Leisure
- High Mast

Accessories

- | | |
|-------------|-----------------------|
| DD | DALI |
| 20KV | 20KV surge protection |
| VS | Anti-glare visor |
| MG | Marine grade coating |

Dimensions

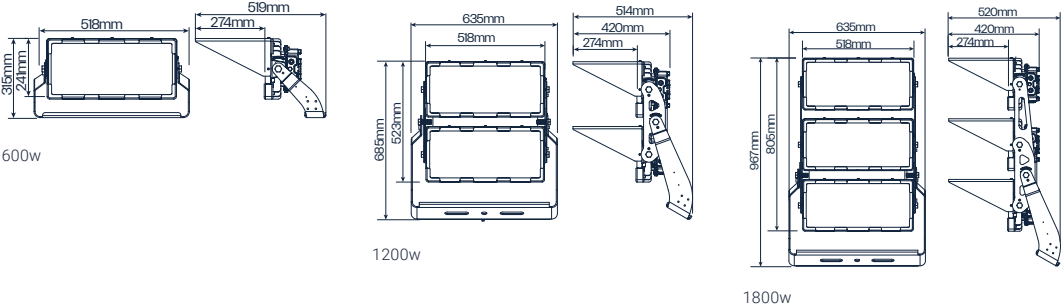

Artemis



Technical Details

Part No.	Description	Windage (m2) When flat mounted	Power (W)	Luminaire Lumens	LI/cW
ART-600-4K	Sports Floodlight	0.0910	600	93000	155.0
ART-1200-4K	Sports Floodlight	0.1161	1200	186000	155.0
ART-1800-4K	Sports Floodlight	0.1412	1800	279000	155.0
ART-600-REM	Sports Floodlight Remote Driver				
ART-1200-REM	Sports Floodlight Remote Driver				
ART-1800-REM	Sports Floodlight Remote Driver				

Body Material	Diffuser Material	Housing Colour	Mounting Type	CCT Offering	CRI	SDCM	UGR Rating	Dimmable	Dimming Method
Die-cast aluminium	Polycarbonate Tempered Glass	Black	Column	3K, 4K, 5K, 65K	80+	3 step Macadam Ellipse	N/A	Available	DALI

IP Rating	IK Rating	Operating Temperature (°C)	L/B value ^{*A}	Terminal Information	Warranty	Weight (kg)
IP66	IK08	-20° + 40°	60K+ L90/B10	Flying lead	5 Year warranty 1 year parts and Labour Inclusive	600W - 11.5 1200W - 22.0 1800W - 30.0

^{*A}: L/B value based on Ta25°C operating temperature, standard operation of luminaire within stated parameters. For specific detail please contact info@powerlitefitz.co.uk
Please contact info@powerlitefitz.co.uk for the Inrush current (A) & No.Per 10A breaker.